

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
3 October 2002 (03.10.2002)

PCT

(10) International Publication Number
WO 02/076723 A1

(51) International Patent Classification⁷: **B32B 5/02**,
9/04, D04H 1/45

(21) International Application Number: PCT/US02/09329

(22) International Filing Date: 26 March 2002 (26.03.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/278,776 26 March 2001 (26.03.2001) US

(71) Applicant (for all designated States except US): **MICREX CORPORATION** [US/US]; 17 Industrial Road, Walpole, MA 02081 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **WALTON, Richard, C.** [US/US]; Apt. 2A, 65 Anderson Street, Boston, MA 02114 (US). **SMITH, Peter, R.** [US/US]; 67 Moosehill Parkway, Sharon, MA 02067 (US).

(74) Agent: **SEPANIK, Daniel, J.**; Fish & Richardson P.C., 225 Franklin Street, Boston, MA 02110 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: NON-WOVEN WIPING

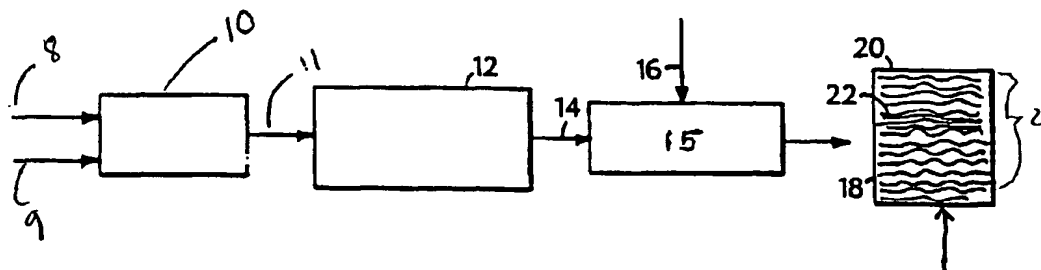

(57) Abstract: A non-woven wet wipe product (22) comprising a sheet member, pre-wetted with a wet wiping agent (32), and disposed in a fluid-proof package (18), the product comprising a segment of a non-woven self-supporting web (150) comprised of an assemblage of hydroentangled fibers including synthetic thermoplastic strength-providing fibers and absorbent or adsorbent fibers, the non-woven web (150) being in a permanent, dry-creped, heat-set condition defining a succession of ridges (24) and grooves (26) in the overall body (30) of the web, the constituent thermoplastic fibers of the sheet member having been heat-set simultaneously during the imparting of the ridges and grooves to the web, the heat-set condition of the dry-creped thermoplastic fibers preserving the ridge and groove configuration during prolonged presence in the web of the wet agent (32), the wet wiping agent being disposed through the body and on the surface of the dry-creped, heat-set sheet-form member and its constituent fibers. The product, packaged in a stack within a liquid tight container, and a method for making the product are also disclosed.

WO 02/076723 A1

5

NON-WOVEN WIPING

TECHNICAL FIELD

This invention relates to non-woven wiping sheets and in particular to so-called "wet wipes", i.e. sheets that are pre-wet with a desired wiping fluid and sold in a fluid tight container.

BACKGROUND

10 Wet wipes are typically non-woven materials made of a combination of synthetic strength fibers and absorbent or adsorbent fibers, which are usually cellulosic fibers such as wood pulp. While useful in many instances, present-day wet wipes may not have the most desirable appearance; they may present considerable drag to being drawn across a surface being wiped; their wiping ability is not as good as may be desired. In general an improved wet wipe would
15 increase their use and convenience.

SUMMARY

In general, the invention pertains to non-woven wet wipe products and methods for making them, the products comprising a sheet member, pre-wetted with a wet wiping agent, and disposed in a fluid-proof package, the product including:

- 20 a. a segment of a non-woven self-supporting web comprised of an assemblage of hydroentangled fibers including synthetic thermoplastic strength-providing fibers and absorbent or adsorbent fibers,
- b. the non-woven web being in a permanent, dry-creped, heat-set condition defining a succession of ridges and grooves in the overall body of the web, the constituent thermoplastic
25 fibers of the sheet member having been heat-set simultaneously during the imparting of the ridges and grooves to the web, the heat-set condition of the dry-creped thermoplastic fibers preserving the ridge and groove configuration during prolonged presence in the web of the wet wiping agent,
- c. the wet wiping agent being disposed through the body and on the surface of the dry-
30 creped, heat-set sheet-form member and its constituent fibers.

In preferred embodiments the sheet is coarsely dry-creped, and the resultant coarse ridges in the fabric contribute to enhanced performance.

“Dry-creping” referred to here means creping a preformed web, without the web being adhesively adhered to a surface (as in a Yankee dryer) and does not preclude the addition of limited moisture during the process, as by adding a modicum of steam to the web to soften fibers to facilitate the dry-creping action.

By “coarse” in reference to the ridge and groove formations imparted to the sheet member by dry, coarse creping while heat-setting, is meant a ridge and groove pattern that, rather than being microscopic or virtually invisible, is sensibly prominent, in general, comprising fewer than about 25 ridges per lineal inch.

Within this parameter, very important further characteristics can be obtained with many webs by the coarse formations. The desirable effects obtained depend upon the type of desired wipe action.

With wet wipes for which a vigorous wiping action is desired, it is advantageous to employ a gross coarse crepe, i.e. the heat set ridge frequency is between about 8 and 15 per lineal inch. The resultant strongly pronounced ridges effectively provide wipe-stress-concentrating edges that enable high wiping pressure (pounds per square inch) to be applied to the edges (the entire wiping force thus being distributed over a relatively low aggregate length of relatively sharp edges). Further, the grossly heat-set coarse dry crepe can contribute significant overall thickness to a single wipe, and, because of the relative randomness of ridges in one wipe sheet in a stack relative to the next, arising because of the absence of complete irregularity in the ridge pattern inherent with creping, the sheets are prevented from nesting, contributing significantly to the space occupied by a single wipe in a stack of wipes. The crepe ridges and grooves thus increase the fluid-carrying capacity of the individual wipes, which is important where a significant flood of the wet wiping agent is required.

With wet wipes for which a moderate wiping action is desired, according to the invention it is readily possible to tailor the conditions of treatment to produce moderately coarse formations, i.e. between about 15 and 20 heat-set ridges per lineal inch. Again there is obtained the stack thickness-enhancing effect of non-alignment of ridges in successive layers of a stack, and significantly enhanced thickness and fluid-carrying capacity to the individual wet wipe

sheet. The greater density of ridges spreads the wiping force over a longer aggregate ridge length, producing lower, but still significant contact pressure at the ridge edges.

For cosmetic use, baby care and other uses in which gentle action is desired, minimally coarse ridges, i.e. between about 20 to 25 ridges per lineal inch, provide the possibility of a relatively gentle wiping action while still obtaining, to a reduced degree, the thickening and liquid-capacity enhancing advantages of the invention.

There are cases where even a finer distribution of the heat-set dry crepe formations in the hydroentangled wet wipe may be employed, as well, e.g. for hypersensitive skin use.

Another feature of the invention, which is important, e.g., for the vigorous and moderate action wipes, is the effect obtained in wiping a smooth surface such as glass or metal plate, or other continuous surface. This has to do with a vacuum-release effect achieved by the permanent fluid-resistant coarse ridge and groove structure, which is particularly noteworthy when employing gross coarse crepes heat-set in the wet wipe. Despite the sheet member having a high fluid-carrying capacity, it is found, during use, that the troughs of the sheet are not completely fluid-filled, i.e. continuous air channels are preserved between adjacent ridges, which communicate with ambient. These air channels are partially retained in the pre-wet sheet even when significant wipe pressure is exerted. Relatively smooth wet wipe sheets (i.e. sheets not having features of the present invention) when pressed against a flat surface being wiped, give up entrapped air at the interface and then tend to be forced, by ambient air pressure, bodily against the surface being wiped. According to the present invention it is realized, that this pressure adds to frictional resistance to lateral movement of the wipe sheet across the work surface, increasing the effort required, by the worker. The coarse creped, heat-set ridges and grooves of wet wipes of the present invention, on the other hand, while achieving improved concentration of wipe pressure at the working ridges are formed to effectively reduce the total wiping effort required, believed to be due to the presentation of the vacuum-releasing air channels.

Accordingly, in preferred embodiments of the invention, the wet wipe product has between about 8 to 25 heat-set dry crepe ridges per lineal inch of the web. For vigorous wiping action, the wet wipe product has between about 8 and 15 heat-set dry crepe ridges per lineal inch of the web, for moderate wiping action, the wet wipe product has between about 15 and 20 heat-set dry crepe ridges per lineal inch of the web, while for fine or gentle wiping action, the wet wipe product has between about 20 and 25 heat-set dry crepe ridges per lineal inch of the web.

In a first aspect, the invention provides a non-woven wet wipe product including a sheet member, pre-wetted with a wet wiping agent, and disposed in a fluid-proof package, the product including a segment of a non-woven self-supporting web made up of an assemblage of hydroentangled fibers including synthetic thermoplastic strength-providing fibers and absorbent or adsorbent fibers. The non-woven web is in a permanent, dry-creped, heat-set condition defining a succession of ridges and grooves in the overall body of the web, the constituent thermoplastic fibers of the sheet member having been heat-set simultaneously during the imparting of the ridges and grooves to the web. The heat-set condition of the dry-creped thermoplastic fibers preserve the ridge and groove configuration during prolonged presence in the web of the wet agent. The wet wiping agent is disposed through the body and on the surface of the dry-creped, heat-set sheet-form member and its constituent fibers.

This aspect of the invention can include one or more of the following additional features. The sheet has been coarsely dry-creped, resulting in a coarse distribution of ridge formations in the sheet. There are between about 8 and 25 heat-set ridges per lineal inch of the web (between about 3.1 and 9.8 ridges per lineal cm). There are between about 8 and 15 heat-set ridges per lineal inch of the web (between about 3.1 and 5.9 ridges per lineal cm). There are between about 15 and 20 heat-set ridges per lineal inch of the web (between about 5.9 and 7.9 ridges per lineal cm). There are between about 20 and 25 heat-set ridges (24) per lineal inch of the web (between about 7.9 and 9.8 ridges per lineal cm). The sheet member is made up of between about 1/3 and 2/3 by weight absorbent or adsorbent fibers and between about 1/3 and 2/3 by weight of synthetic thermoplastic, strength-imparting fibers. The sheet member comprises about equal weight of the absorbent or adsorbent fibers and the thermoplastic, strength-imparting fibers. The thermoplastic fibers include PET (polyester). The thermoplastic fibers include polypropylene. The absorbent or adsorbent fibers are cellulosic. The cellulosic fibers are natural fibers. The absorbent or adsorbent fibers include rayon. The wet wipe product includes fibers of PET and fibers of wood pulp. The pre-form web from which the wet wipe product is made is a spunlace web. The wet wiping agent is, at least partially, an aqueous agent. The wet wiping agent includes a soap, a detergent, a solvent, a cleaning, a window washing, a sanitizing, a biociding, a polishing, an abrading and/or a neutralizing agent. The wet wiping agent includes an insect repellant, a paint solvent, a paint remover, a finish remover, an oil solvent, a grease solvent, a

cosmetic remover, a makeup remover, a stain remover, a stain, a paint, a varnish, a wax and/or a polish.

5 In another aspect, the invention provides a package containing a face-to-face stack of a plurality of sheet members, each sheet member being a segment of a non-woven self-supporting web made up of an assemblage of hydroentangled fibers including synthetic thermoplastic strength-providing fibers and absorbent or adsorbent fibers. The non-woven web is in a permanent, dry-creped, heat-set condition defining a succession of ridges and grooves in the overall body of the web, the constituent thermoplastic fibers of the sheet member having been heat-set simultaneously during the imparting of the ridges and grooves to the web. The heat-set
10 condition of the dry-creped thermoplastic fibers preserves the ridge and groove configuration during prolonged presence in the web of the wet agent. The wet wiping agent is disposed through the body and on the surface of the dry-creped, heat-set sheet-form member and its constituent fibers.

15 This aspect of the invention can include any one or more of the features discussed above with reference to the first aspect of the invention.

In another aspect, the invention provides a method of producing a wet wipe product including providing a self-supporting non-woven assemblage of hydroentangled fibers including synthetic thermoplastic strength-providing fibers and absorbent or adsorbent fibers; passing the non-woven assemblage through a dry-creping machine to impart ridges and grooves to a body of the assemblage while simultaneously heating the assemblage to a temperature above the
20 temperature required to heat-set the thermoplastic fibers; and, thereafter, sizing the assemblage into a wipe member, pre-applying a wet wiping agent so that the wet wiping agent is disposed through the body and on the surface of the dry-creped sheet-form member and its constituent fibers, and sealing the wipe member in a fluid-tight package.

25 This aspect of the invention can include any one or more of the following additional features. The dry-creping is performed under conditions to produce coarse dry-crepe. A spunlace process is employed for providing the nonwoven assemblage. The assemblage is formed by providing a carded web of polyester fibers, introducing a layer of wood pulp to the carded web, and subjecting the layer of wood pulp and the carded web to hydroentanglement
30 followed by dewatering and drying prior to dry-creping. The method includes conducting the dry-creping step with a bladed drycreper including a driven roll and a pressing surface for

Attorney Docket No: 02703-022W01

pressing the fiber assemblage against the driven roll sufficiently to cause the fiber assemblage to be advanced forward, and opposing the advance of the assemblage in the direction of the plane of the assemblage with a retarder blade, a tip of which is held adjacent the driven roll, at least one surface of the drycreper being heated to heat the thermoplastic fiber constituent to heat-set temperature of the thermoplastic fibers. The absorbent or adsorbent fibers include wood pulp fibers, the fiber assemblage is substantially free of thermoplastic binder, and the dry-creping is conducted in a manner leaving the wood pulp fibers substantially permanently uncompressed in the direction of the thickness of the assemblage. The thermoplastic fibers include PET (polyester) and the surface of the drycreper is heated to a temperature between about 250 and 350 F (139 C and 194 C). The pressing surface and/or the driven roll are heated. The dry-creping and simultaneous heat setting is carried out under conditions in which the absorbent or adsorbent fibers are substantially uncompressed in a direction of thickness of the web during formation of the dry-crepe. The driven roll of the drycreper includes a continuous cylinder, the roll being equipped with an internal heater (H'). The internal heater (H') employs an electric resistance heater. The internal heater (H') includes heat exchange passages through which a hot fluid is passed. The hot fluid is hot water, steam, hot gas, hot air or combustion gas. The dry-creping and simultaneous heat-setting is conducted in a manner to shorten the web at least 4%, increasing a bulk thickness of the sheet member. The dry-creping and simultaneous heat-setting is conducted in a manner to shorten the web within the range between about 4 to 25%. The dry-creping and simultaneous heat-setting is carried out to provide shortening between about 4 and 12%. The dry-creping and simultaneous heat-setting is carried out to provide shortening between about 4 and 8%. A plurality of the sheet members, in a stack and in face-to-face contact, are packaged wet in a fluid tight container. The method includes adding to the sheet members before completing the packaging a soap, a detergent, a solvent, a cleaning, a window washing, a sanitizing, a biociding, a polishing, an abrading and/or a neutralizing agent. The method includes adding to the sheet members before completing the packaging an insect repellant, a paint solvent, a paint remover, a finish remover, an oil solvent, a grease solvent, a cosmetic remover, a makeup remover, a stain remover, a stain, a paint, a varnish, a wax and/or a polish.

The details of one or more embodiments of the invention are set forth in the accompanying drawings and the description below. Other features, objects, and advantages of the invention will be apparent from the description and drawings, and from the claims.

DESCRIPTION OF DRAWINGS

5 FIG 1 is a flow diagram of the new process of the invention.

FIG 2 is a magnified view of a pre-moistened wipe produced by the process of Fig. 1.

FIG 3 and 4 are successively magnified diagrammatic views of a portion of the product of Fig. 2.

10 FIGS. 5, 5A, 5B and 5C are photo views of the faces of selected preferred embodiments of the product of the invention prior to application of the moistening agent.

FIG 6 is a diagrammatic view of one preferred method of forming a pre-form product of hydroentangled fibers while FIGS. 6A-6D are diagrammatic view of complete machines for forming hydroentangled pre-form products.

15 FIG 7 diagrammatically illustrates a pre-formed hydroentangled product and the foraminous surface on which it is formed.

FIG 8 is a diagrammatic view of a preferred form of the dry-creping step of the process illustrating the application of heat to the hydroentangled product during the dry-creping process.

20 FIG 9 is a perspective illustration of a preferred drycreper machine, while FIG 10 illustrates, in cross-section, machine components that apply heat during the processing of the fabric.

FIG 11 illustrates shortening of the web as it passes through the drycreper, FIG 12 is a diagram of the conformation of the dry-creping cavity through which the material is passed.

25 FIG 13 shows a thickness-measuring device measuring a stack of untreated sheets while FIG 14 shows the same device measuring a stack of the same number of sheets treated according to the invention.

DETAILED DESCRIPTION

Referring to Fig. 1 a composite web is formed to provide a pre-form web 11 for manufacture of the product. The constituents of pre-form are thermoplastic strength-providing
30 fibers 8, presently preferred, the fibers containing PET, and fibers of sorbent material 9, presently

preferred, hygroscopic wood pulp. The percentage by weight of absorbent or adsorbent fibers 8 of preform 11 is between about 1/3 and 2/3 while the percentage by weight of thermoplastic fibers is about within this same range. In some instances the percentage by weight of absorbent or adsorbent fibers 8 is about equal to that thermoplastic fibers 9. The fibers are introduced to a machine 10 of suitable construction for providing a pre-formed web 11, i.e., an assemblage of fibers, having structural elements throughout the composite, with which are interspersed fine sorbent fibers.

The pre-form sheet 11 is introduced to a drycreper machine 12 which is characterized by its application of heat to the pre-form just before or during the dry-creping process. The applied heat is of a level sufficient, under creping conditions, to heat-set the thermoplastic strength-providing fibers to establish permanence of the crepe configuration under prolonged wet conditions. Following the dry-creping apparatus 12, the dry-creped pre-form 14 is introduced to an apparatus 15 that performs a sizing process and introduces a wiping fluid 16 to the substrate as by spraying, immersion or flooding. Either before or after application of wiping fluid 16, the sheet is cut to size and introduced to a container 18 which is sealed by a top 20, the container containing a multiplicity, e.g., a stack 21, of individual layers 22 each containing the wiping fluid 16. These resultant wet wipes 22 are ready for use by the consumer in a one-step process to perform the desired action, for instance a cleaning action, a polishing action, a dusting action or the application of a fluid to a surface.

Referring to Fig. 2, an individual layer 22 from container 18 has a selected creped configuration such as, for instance, the crepe undulations as shown. The ridges 24 and grooves 26 in the pattern are not precisely identical, one to the next, due to the slightly random or statistical nature of dry-creping, which is based on columnar collapse of successive segments of the web as the driving forces are opposed by retarding forces. Due to slight variations in the thickness, fiber orientation, or fiber concentration in adjacent increments of the web, the crepe repeat length, P, varies slightly in adjacent ridge and groove formations. Because of the randomness of the ridge and groove location on each sheet, adjacent layers 22 within package 18 are highly unlikely to "nest" together, i.e., some amount of separation exists between adjacent wipes in the container. This phenomenon reduces the likelihood that adjacent sheets will cling to one another and helps to ensure that a single wipe can be removed without "pull along," e.g., by friction or adhesion a directly subjacent wipe.

Depicted in Fig. 2 are pockets 28 of fluid 16 contained in crevices formed by the dry-crepe ridges 24 and grooves 26, and within the body 30 of the dry-creped fabric. The further magnified view of Fig. 3 illustrates better that quantities of fluid 16 are trapped within the interstices of the substance of the layer 22 and in the conformations provided by the dry-crepe that has been heat-set. Illustrated also in Figs. 3 and 4 are continuous regions 34 of air in the channels or troughs of the pre-wet sheet. These channels communicate with ambient air.

Fig. 4 depicts, diagrammatically, the thermoplastic fibers 8 in their heat-set condition, forming the web as a whole into the permanent crepes. Fig. 4 also depicts the hydroentangled absorbent fiber 9 constituent of the substrate. Again, the aggregations of moisture 16 are depicted, it being also understood that a large percentage of the moisture can be imbibed in the body 30 of fibers of the absorbent pulp or other hygroscopic component of the web.

Referring to Fig. 5, the somewhat random distribution of ridges from one region, e.g., region 36, of a sheet 22 to another, e.g., region 38, is clearly seen. Referring now also to Figs. 5A-5C, sheets 22, 22', 22'' and 22''' illustrate the varying degrees of coarse dry-crepe that are achievable, such varying degrees being suitable for customizing a wet wipe to different particular applications. As an example, an infant care wipe or a cosmetic wipe may have the finer heat-set crepes of sheet 22''' (Fig. 5C), with ridges at density of the order of 20 to 25 per lineal inch, while a wipe suitable for window cleaning, dusting, or wiping of machinery may have the grossly coarse configuration of sheet 22 (Fig. 5), with ridge density between about 8 and 15 ridges per inch. Sheets 22' and 22'' (Figs. 5A and 5B, respectively) illustrate intermediate products. The crepe frequency is easily selectable by the setting of the drycreper machine 14 (Fig. 1) to tailor the conformation of the fabric to the type of wiping agent that is to be added for the pre-moistened wipe product desired.

In the presently preferred embodiment, the step 10 (Fig. 1) of pre-forming the web is performed employing the spunlace process that is well known. That process involves hydroentanglement of fibers, such as generally described in the early patents of DuPont, for instance U.S. Patent 3,485,706, and in early patents of Chicopee Mills, for instance U.S. Patent 3,679,535 and 3,679,536 and the many later patents in the field which make reference to these early patents. For instance, the reader is referred to U.S. Patents 5,240,764; 5,254,399; 5,227,224 and 5,284,703. Another example is UK Patent Publication 2 114 173A.

The general, presently preferred process is illustrated in Fig. 6. The drawing indicates that the basic elements of the spunlace process involve a web-former 40, a forming surface 42, in this case an open weave plastic or wire belt, high-pressure water jets 44, a dryer 46 and a windup station 48 for the hydroentangled pre-form product. In practice, web former 40, delivers, e.g., a dry formed web or a wet formed web of fibers as a loose pre-formed web or batt 41 onto the forming surface 42. While in contact with the forming surface, the web or batt is subjected to the high-pressure water jets. In some embodiments, such as the one illustrated in Fig. 6A, vacuum boxes 47 are provided adjacent the forming surface on a side opposite water jets 44 to enhance the entangling energy applied to the web formation 41. In any event, the energy in the water stream displaces the fibers of the web or batt from the solid filaments 43 making up the forming surface 42 and works the fibers into the interstices 45 between the forming surface filaments, see Fig. 7. In the process, the force of the water also twists and entangles the fibers so that a strong integrated fabric 50 is obtained which may have the appearance of the reverse image of the forming belt or surface. Referring further to Fig. 7, the non-woven web 50 has been formed and water jet entangled on forming surface 42, e.g., an open weave belt.

In the early process known as the Evans process, as described in U.S. Patent 3,485,706, textile-like non-woven fabrics were produced by traversing fibrous materials with high-energy liquid streams while the materials were supported on an apertured member such as a perforated plate or a woven wire screen. The action served to consolidate the material in a repeating pattern of entangled fiber regions and interconnecting fibers. With this process various types of fibers can be employed, for instance staple fiber and continuous filament. In the case of the present invention, the fibers are formed as a composite, including synthetic thermoplastic fibers and sorbent fibers. In general, in the early days, the preferred range of openness of the forming surface was considered to be between about 35 to 65 percent and the water pressure used was preferably in the range of 200 psi to 1200 psi (1.4 to 8.3 mPa). The orifice diameters for the water jets were recognized to lie in the range of between 0.003 inch and 0.030 inch (0.08 to 0.8 mm.) in diameter.

Another process known from the Honeycomb Systems Company is illustrated in Fig. 6B. This shows a web former, a drum entangling unit, a water extraction roll and a through air dryer. A honeycomb roll adds a support medium providing for a compact machine design with the option of entangling on both sides of the web by employing two drum entanglers. A further

advantage of the equipment lay in the fact that the high open area and rigid structure of the honeycomb shell provided support to the substrate while allowing the diffused water from the high pressure jets to pass through the shell to vacuum slots.

5 In the machine described in Fig. 6C known as the "Perfojet Process", the web is first pre-entangled using water jets and then a curtain of water ranging from 3 to 8 mils in thickness is passed through a perforated cylinder and through a fiber web which is positioned on a backing belt. As the water curtain passes through the perforated cylinder, precise jets of water form and shape a pattern corresponding to the screen pattern. This patterned water screen rearranges the fiber webs to the screen pattern. The processes illustrated in FIGS. 6A, 6B and 6C are further
10 described in a technical paper, entitled "Spunlace Processes Worldwide," by Peter N. Britton, Ph.D., to which article the reader is referred.

In the embodiment of Fig. 6D a forming screen 100 receives a carded web 102 of PET fibers and an equal quantity of wood pulp 104, which is deposited upon carded web 102. This composite 106 is passed to a first hydrobond station 108 in which high-pressure water jets (not
15 shown) cause entanglement of the wood pulp fibers with themselves and with the fibers of the thermoplastic strength web. The resulting web 110 is then in effect turned over and subjected to a second hydrobonding action at a second hydrobonding station 112, which further entangles the fibers making up the composite. From there the web 114 is passed to a squeeze nip 116 for removing excess water and then the composite is introduced to a heated dryer 118 for removing
20 the moisture and producing the dried hydroentangled web 120 which is wound in a reel 122 for further processing.

The presently preferred machine for conducting dry-creping of such composite webs is described in U.S. Patent 3,260,778, to which the reader is referred, some of the drawings of which are substantially reproduced in the present application as Figs. 8-13. The composite
25 hydroentangled web 150 is introduced to the drive roll 152 and under a stationary presser member 154, referred to in the patent as a "shoe," which has an underlying sheet member 155 that presses web 150 against the advancing drive roll 152 to cause the web to be driven forward towards a retarder element 156. The dimensions of the cavity formed by roll 152, sheet member 155 and retarder 156, see Fig. 13, further described below, are adjusted to a relatively wide final
30 condition to enable the web to be coarsely folded upon itself by repeated columnar collapse of the sheet, to form the preferred coarse ridges and grooves that have been described. While the

web receives no substantial squeezing pressure in the direction of its thickness, the web is dimensionally constrained, thickness-wise, to establish the coarseness of the dry-crepe.

Referring particularly to the diagram of Fig. 12, W indicates the nip thickness of the material, Y indicates the original thickness of the material, Z indicates the maximum separation of the divergent surfaces, R indicates the minimum separation of the surfaces of the retarding passage, referred to as the retarding restriction, θ indicates the obtuse angle between material on the moving surface as it approaches the retarding surface and the resultant of retarding forces imposed by the retarding passage at its retarding restriction R and ϕ indicates the substantial acute angle included between retarding surface and the direction of movement of the traveling surface. The treatment cavity comprising zones B+C begins where the diverging walls are spaced apart a distance Y corresponding substantially to the original thickness of the material. The separation of the diverging surfaces increases progressively to its maximum dimension Z and then the cavity converges to the retarding restriction R. In operation the pile of microcondensed material extends through the obtuse angle θ back into the divergent passage from retarding restriction R, through the maximum dimension Z, thus longitudinally transmitting resistance forces from the retarding passage which oppose the fresh material forced forward into the divergent passage. Change in the retarder angle ϕ changes the value of obtuse pile angle θ for any given relation of the other elements. With this preferred embodiment, in order to obtain the needed high resistance forces in the needed short length treatment cavity, and to obtain smooth movement of the material from the traveling surface to the retarder surface without cutting, the angle ϕ must be substantial, and not highly acute. But if angle ϕ is too great, then the pile of condensed material will buckle into the open "V" causing jamming of the machine or shearing of the material. Thus, angle ϕ must be a substantial acute angle as noted above. For any given set of conditions there is generally found an optimum angle setting which cooperates with the force action of the other elements to obtain optimum microcondensing. It has been found that with changes in the total dimension B+C to treat differing materials which involves substantial movement of the retarding surface relative to zone A, if the angle ϕ remains constant, smooth flow of the material and proper transmittal of resistance by the pile results.

Substantially simultaneously with being dry-creped, heat is applied to web 150, for instance by heaters H associated with the presser member 154 and/or by heaters H' disposed in the driven roll 152. The heating mode may be any of the numerous known kinds, e.g., electric

resistance, steam, hot water, hot gas or hot air. Radiant or flame pre-heating may also be employed. The heat thus imparted to the fabric cooperates with mechanical heat generated in the physical dry-creping action and the pressure applied to the sheet material in the directions of the plane of the material when the (preferably coarse) crepes are pushed against each other to
5 effectively, permanently deform the thermoplastic constituents of the web to impart permanent ridges and grooves to the material that resist prolonged presence of wiping fluid.

After being so treated, the web is passed to station 16 (Fig. 1) where fabrication of the wet wipes is completed.

While the bladed drycreper shown is presently preferred, see U.S. Patent No. 3,260,778,
10 other dry-creping machines may be employed in appropriate instances, for instance those machines described in U.S. Patent Nos. 3,810,280; 3,869,768; 3,975,806; 4,142,278; 4,894,196; 4,859,169 and 3,236,718, may also be employed. The reader is referred to each of these publications.

The adjustment of the retarder blade 156 back from the presser member 154 and its
15 associated sheet member 155 is effective to open the dry-crepe cavity (Fig. 9) to increase the size and decrease the frequency of the crepes.

Other alternative methods and apparatus suitable for carrying out the dry-creping process of the present invention are disclosed in Walton U.S. 2,915,109 and Packard U.S. 4,090,385, to which the reader is also referred. Briefly, these references show longitudinally compacting a
20 web by feeding it over a roll that has alternating, circumferential ribs and grooves along its length. A flat shoe presses the web against the roll to enable the ribs of the roll to drive the web forward. Then a cylindrical comb (rotating with a peripheral speed lower than the roll) or a fixed comb (whose teeth mate with the grooves of the main roll) lifts the web from the main roll and at the same time compacts it longitudinally. In the latter case, a wide, flexible metal sheet
25 extension from the shoe engages the face of the web opposite the web face that engages the retarder comb, to form with the retarder comb a confirming passage for the creped material. These methods and apparatus are modified to provide the necessary heat to heat-set the thus dry-creped material.

Referring particularly to Fig. 11, the hydroentangled web 150 is compacted in the dry-
30 creping process, zones B+C, so that an uncompacted region, zone A, is shortened, zone D. In some embodiments the percentage of compaction is between about 4% and 25%, i.e., the

material defining the length of zone D is between about 75% and 96% the length of zone A. In other embodiments the percentage of compaction is between about 4% and 12%. In yet other embodiments the percentage of compaction is between about 4% and 8%.

Referring to Figs. 13 and 14, dramatic results achieved by the invention are suggested by measuring a stack of wipe members with and without the heat-set dry-crepe treatment described (prior to application of the wet wiping agent).

Whereas the stack in Fig. 13 of eight untreated wipes measures 0.074 inch thickness, the stack eight of wipes with gross coarse dry-crepe in Fig. 14 measures 0.234 inch thickness (ridges are not aligned in adjacent sheets due to the slight randomness of the dry creping process). It is found that, with application of the wet wiping agent to, for instance, sheets of the preferred embodiment, the ridges in the sheet members of Fig. 14 are substantially preserved despite the tendencies of the pulp fibers to expand and straighten upon imbibing wiping liquid.

Each and every one of the above referenced publications is hereby fully incorporated by reference, including: U.S. Patent Nos. 2,915,109; 3,236,718; 3,260,778; 3,485,706; 3,679,535; 3,679,536; 3,810,280; 3,869,768; 3,975,806; 4,090,385; 4,142,278; 4,894,196; 4,859,169; 5,240,764; 5,254,399; 5,227,224 and 5,284,703, GB Patent No. 2 114 173A and the technical paper entitled, "Spunlace Processes Worldwide," by Peter N. Britton, Ph.D.

Within the spirit and scope of the above teachings, numerous variations in the parameters, combinations and apparatus described are to be employed depending upon the specific products desired, and are within the following claims.

WHAT IS CLAIMED IS:

- 1 1. A non-woven wet wipe product (22) comprising a sheet member, pre-wetted with a
2 wet wiping agent (16), and disposed in a fluid-proof package (18), the product comprising:
 - 3 a. a segment of a non-woven self-supporting web (11, 120, 150) comprised of an
4 assemblage of hydroentangled fibers (8, 9) including synthetic thermoplastic strength-
5 providing fibers (8) and absorbent or adsorbent fibers (9),
6 b. the non-woven web (14) being in a permanent, dry-creped, heat-set condition
7 defining a succession of ridges (24) and grooves (26) in the overall body (30) of the web, the
8 constituent thermoplastic fibers (8) of the sheet member having been heat-set simultaneously
9 during the imparting of the ridges and grooves to the web, the heat-set condition of the dry-
10 creped thermoplastic fibers preserving the ridge and groove configuration during prolonged
11 presence in the web of the wet agent (16),
12 c. the wet wiping agent (16) being disposed through the body (30) and on the
13 surface of the dry-creped, heat-set sheet-form member and its constituent fibers (8, 9).
- 1 2. The wet wipe product (22) of claim 1 in which the sheet has been coarsely dry-
2 creped, resulting in a coarse distribution of ridge formations (24) in the sheet.
- 1 3. The wet wipe product of claim 1 in which there are between about 8 and 25 heat-set
2 ridges (24) per lineal inch of the web (between about 3.1 and 9.8 ridges per linear cm).
- 1 4. The wet wipe product (22) of claim 1 in which there are between about 8 and 15 heat-
2 set ridges (24) per lineal inch of the web (between about 3.1 and 5.9 ridges per lineal cm).
- 1 5. The wet wipe product (22) of claim 1 in which there are between about 15 and 20
2 heat-set ridges (24) per lineal inch of the web (between about 5.9 and 7.9 ridges per lineal
3 cm).
- 1 6. The wet wipe product (22) of claim 1 in which there are between about 20 and 25
2 heat-set ridges (24) per lineal inch of the web (between about 7.9 and 9.8 ridges per lineal
3 cm).

- 1 7. The wet wipe product (22) of claim 1 in which the sheet member is comprised of
2 between about 1/3 and 2/3 by weight absorbent or adsorbent fibers (9) and between about 1/3
3 and 2/3 by weight of synthetic thermoplastic, strength-imparting fibers (8).
- 1 8. The wet wipe product (22) of claim 1 in which the sheet member comprises about
2 equal weight of the absorbent or adsorbent fibers and the thermoplastic, strength-imparting
3 fibers (8).
- 1 9. The wet wipe product (22) of claim 1 in which the thermoplastic fibers (8) comprise
2 PET (polyester).
- 1 10. The wet wipe product (22) of claim 1 in which the thermoplastic fibers (8) comprise
2 polypropylene.
- 1 11. The wet wipe product (22) of claim 1 in which the absorbent or adsorbent fibers (9)
2 are cellulosic.
- 1 12. The wet wipe product (22) of claim 11 in which the cellulosic fibers comprise natural
2 fibers.
- 1 13. The wet wipe product (22) of claim 1 in which the absorbent or adsorbent fibers
2 (0)comprise rayon.
- 1 14. The wet wipe product (22) of claim 1 comprising fibers (8) of PET and fibers (9) of
2 wood pulp.
- 1 15. The wet wipe product (22) of claim 1 in which the web (11, 120, 150) comprises a
2 spunlace web (120).
- 1 16. The wet wipe product (22) of claim 1 in which the wet wiping agent (16) comprises
2 an aqueous agent.
- 1 17. The wet wipe product (22) of claim 16 in which the wet wiping agent (16) comprises
2 one of a soap, a detergent, a solvent, a cleaning, a window washing, a sanitizing, a biociding,
3 a polishing, an abrading and a neutralizing agent.

1 18. The wet wipe product (22) of claim 16 in which the wet wiping agent (16) comprises
2 one of an insect repellant, a paint solvent, a paint remover, a finish remover, an oil solvent, a
3 grease solvent, a cosmetic remover, a makeup remover, a stain remover, a stain, a paint, a
4 varnish, a wax and a polish.

1 19. A package (18) comprising a face-to-face stack (21) of a plurality of sheet members
2 (22), each sheet member comprising:

3 a. a segment of a non-woven self-supporting web (11, 120, 150) comprised of an
4 assemblage of hydroentangled fibers (8, 9) including synthetic thermoplastic strength-
5 providing fibers (8) and absorbent or adsorbent fibers (9),

6 b. the non-woven web (14) being in a permanent, dry-creped, heat-set
7 condition defining a succession of ridges (24) and grooves (26) in the overall body (30) of the
8 web, the constituent thermoplastic fibers (8) of the sheet member having been heat-set
9 simultaneously during the imparting of the ridges (24) and grooves (26) to the web, the heat-
10 set condition of the dry-creped thermoplastic fibers (8) preserving the ridge (24) and groove
11 (26) configuration during prolonged presence in the web of the wet agent (16),

12 c. the wet wiping agent (16) being disposed through the body and on the surface
13 of the dry-creped, heat-set sheet-form member and its constituent fibers (8, 9).

1 20. A method of producing a wet wipe product (22) comprising:

2 a. providing a self-supporting non-woven assemblage (11, 150) of
3 hydroentangled fibers (8, 9) including synthetic thermoplastic strength-providing fibers (8)
4 and absorbent or adsorbent fibers (9),





5 b. passing the non-woven assemblage (11, 120, 150) through a dry-creping
6 machine (149) to impart ridges and grooves to a body (30) of the assemblage while
7 simultaneously heating the assemblage to a temperature above the temperature required to
8 heat-set the thermoplastic fibers (8), and

9 c. thereafter sizing the assemblage into a wipe member (22), pre-applying a wet
10 wiping agent (16) so that the wet wiping agent is disposed through the body (30) and on the
11 surface of the dry-creped sheet-form member and its constituent fibers (8, 9), and sealing the
12 wipe member in a fluid-tight package (18).

- 1 21. The method of claim 20 in which the dry-creping is performed under conditions to
2 produce coarse dry-crepe.
- 1 22. The method of claim 21 comprising employing a spunlace process for providing the
2 nonwoven assemblage (11, 150).
- 1 23. The method of claim 21 in which the assemblage (11, 120, 150) is formed by
2 providing a carded web of polyester fibers (8) introducing a layer of wood pulp (9) to the
3 carded web, and subjecting the layer of wood pulp and carded web to hydroentanglement
4 followed by dewatering and drying prior to dry-creping.
- 1 24. The method of claim 21 comprising conducting the dry-creping step with a bladed
2 drycreper comprising a driven roll (152), a pressing surface (154, 155) pressing the fiber
3 assemblage (150) against the driven roll sufficiently to cause the fiber assemblage to be
4 advanced forward, and opposing the advance of the assemblage in the direction of the plane
5 of the assemblage with a retarder blade (156), a tip of which is held adjacent the driven roll,
6 at least one surface of the drycreper being heated to heat the thermoplastic fiber constituent
7 to heat-set temperature of the thermoplastic fibers.
- 1 25. The method of claim 24 in which the sorbent fibers (9) comprise wood pulp fibers,
2 the fiber assemblage is substantially free of thermoplastic binder, and the dry-creping is
3 conducted in a manner leaving the wood pulp fibers substantially permanently uncompressed
4 in the direction of the thickness of the assemblage.
- 1 26. The method of claim 24 in which the thermoplastic fibers (8) include PET (polyester)
2 and said surface of the drycreper (149) is heated to a temperature between about 250 and 350
3 F (139 C and 194 C).
- 1 27. The method of claim 26 in which the pressing surface (154, 155) is so heated.
- 1 28. The method of claim 27 in which the driven roll (152) is so heated.
- 1 29. The method of claim 26 in which the driven roll (152) is so heated.

- 1 30. The method of claim 24 in which the dry-creping and simultaneous heat setting is
2 carried out under conditions in which the absorbent or adsorbent fibers (9) are substantially
3 uncompressed in a direction of thickness of the web (11, 120, 150) during formation of the
4 dry-crepe.
- 1 31. The method of claim 24 in which the driven roll (152) of the drycreper includes a
2 continuous cylinder, the roll being equipped with an internal heater (H').
- 1 32. The method of claim 31, wherein the internal heater (H') comprises an electric
2 resistance heater.
- 1 33. The method of claim 31, wherein the internal heater (H') comprises heat exchange
2 passages through which a hot fluid is passed.
- 1 34. The method of claim 33, wherein the hot fluid is one of hot water, steam, hot gas, hot
2 air and combustion gas.
- 1 35. The method of claim 25 in which the dry-creping and simultaneous heat-setting is
2 conducted in a manner to shorten the web (11, 150) at least 4%, increasing a bulk thickness
3 of the sheet member.
- 1 36. The method of claim 35 in which the dry-creping and simultaneous heat-setting is
2 conducted in a manner to shorten the web (11, 120, 150) within the range between about 4 to
3 25%.
- 1 37. The method of claim 35 in which the dry-creping and simultaneous heat-setting is
2 conducted in a manner to shorten the web (11, 120, 150) within the range between about 4
3 and 12%.
- 1 38. The method of claim 35 in which the dry-creping and simultaneous heat-setting is
2 conducted in a manner to shorten the web (11, 120, 150) within the range between about 4
3 and 8%.
- 1 39. The method of claim 24, in which a plurality of said sheet members (22), in a stack
2 (21) in face-to-face contact, are packaged wet in a fluid tight container (18).

- 1 40. The method of claim 39 including adding to the sheet members (22) before
2 completing the packaging one of a soap, a detergent, a solvent, a cleaning, a window
3 washing, a sanitizing, a biociding, a polishing, an abrading and a neutralizing agent.
- 1 41. The method of claim 39 including adding to the sheet members (22) before
2 completing the packaging one of an insect repellent, a paint solvent, a paint remover, a finish
3 remover, an oil solvent, a grease solvent, a cosmetic remover, a makeup remover, a stain
4 remover, a stain, a paint, a varnish, a wax and a polish.

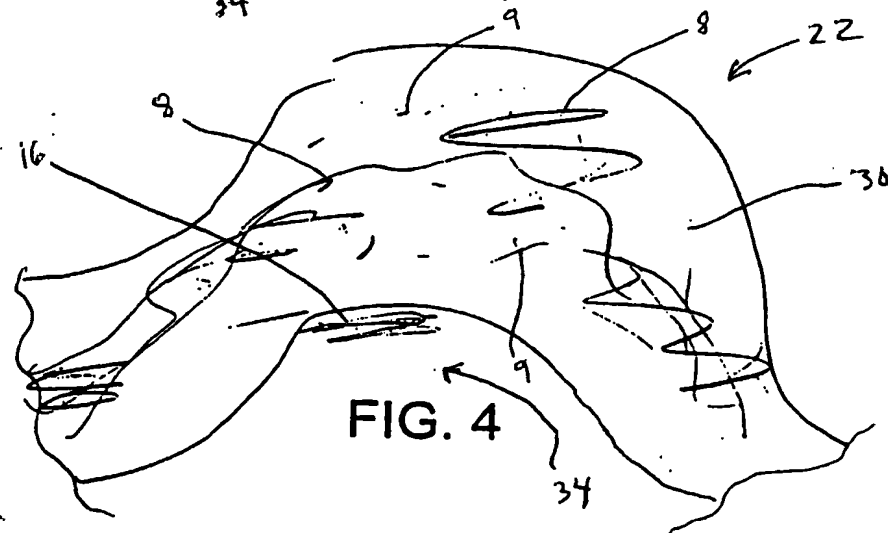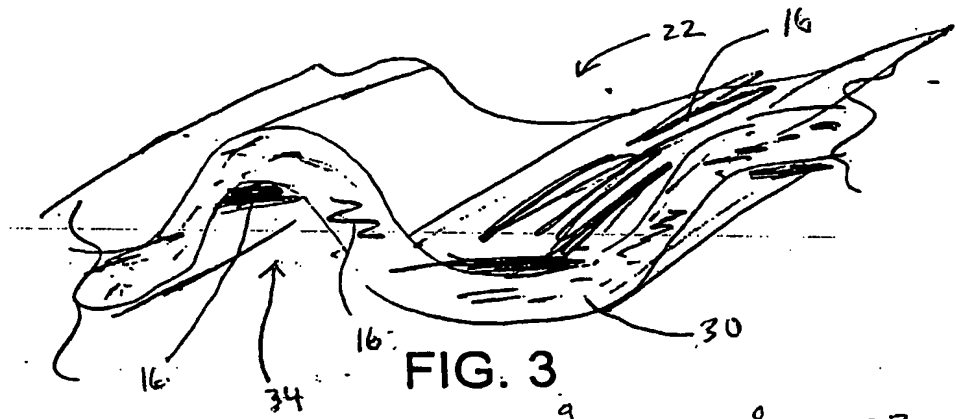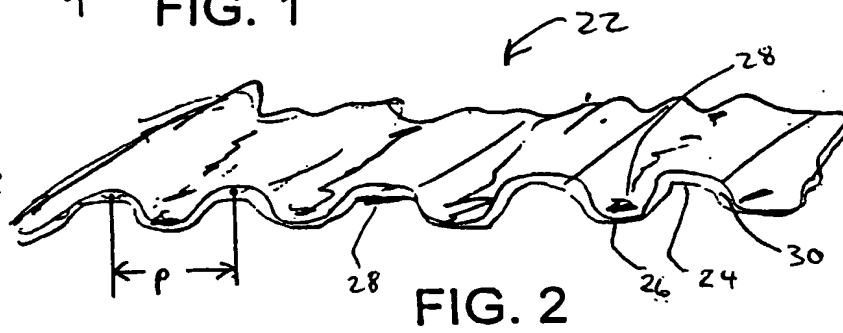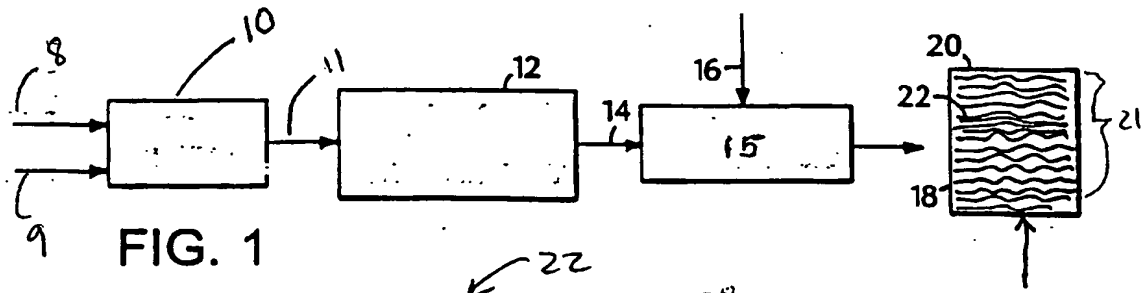

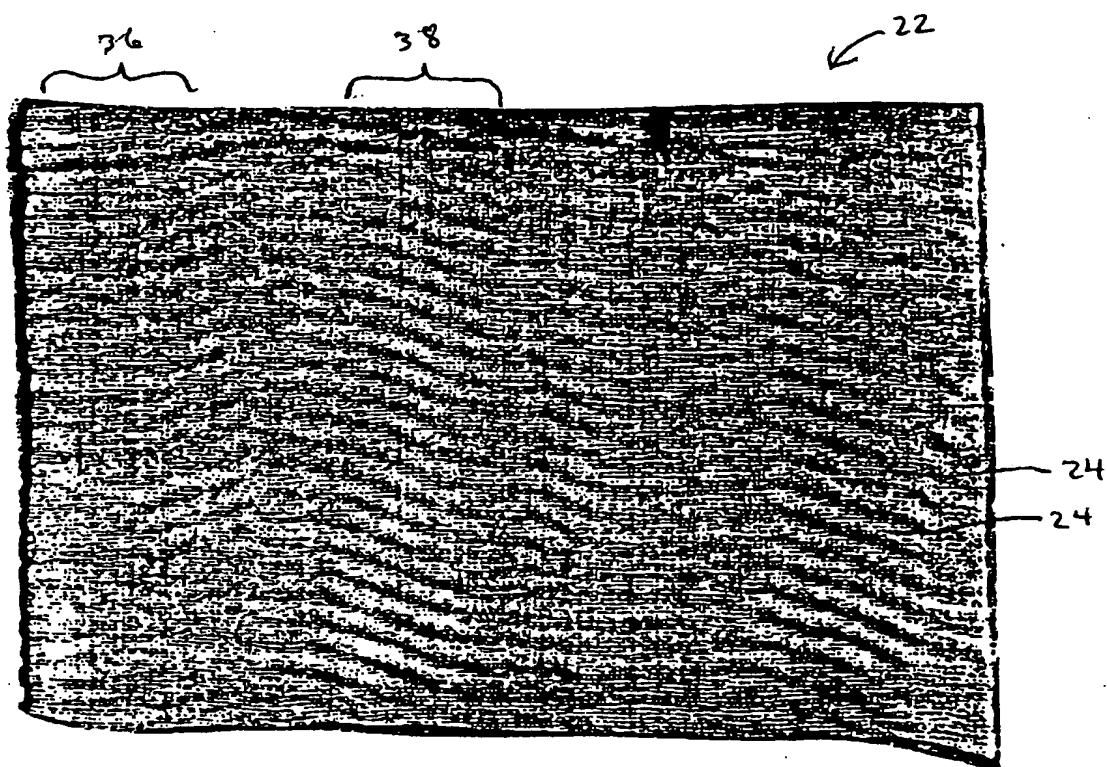


FIG. 5

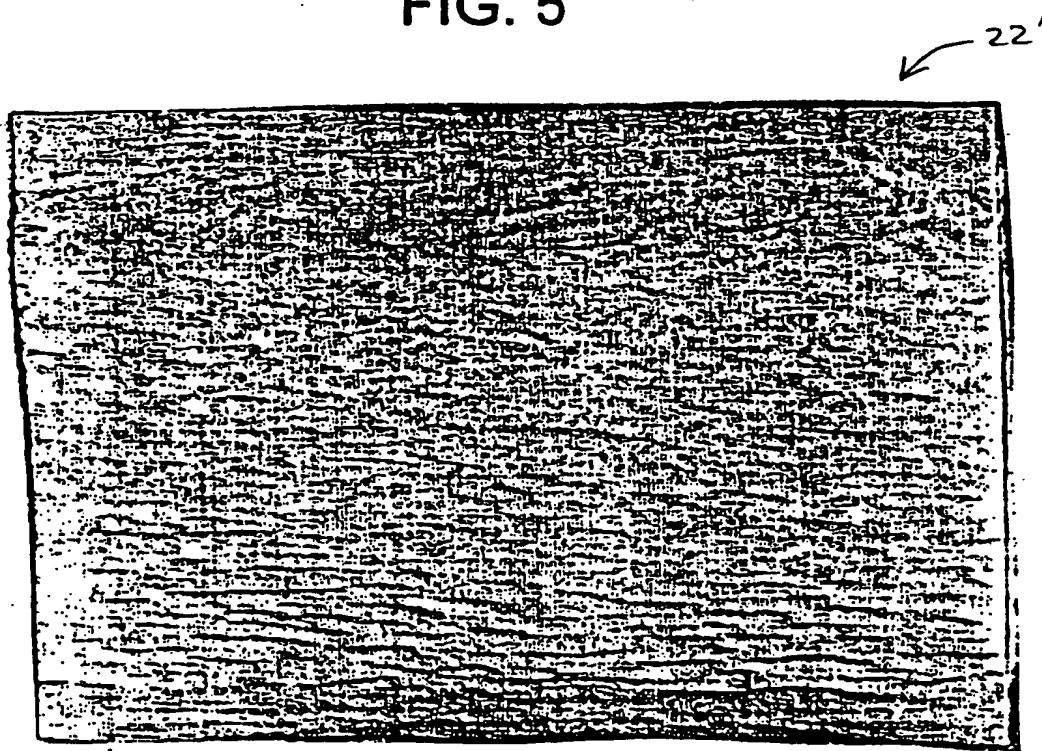


FIG. 5A

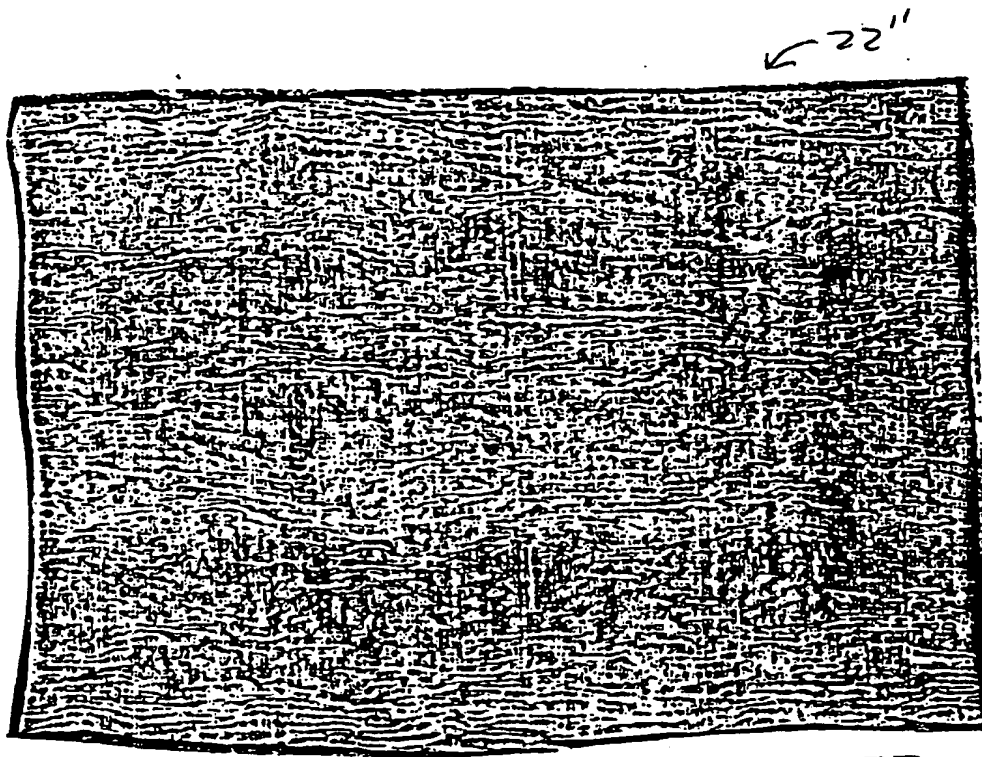


FIG. 5B

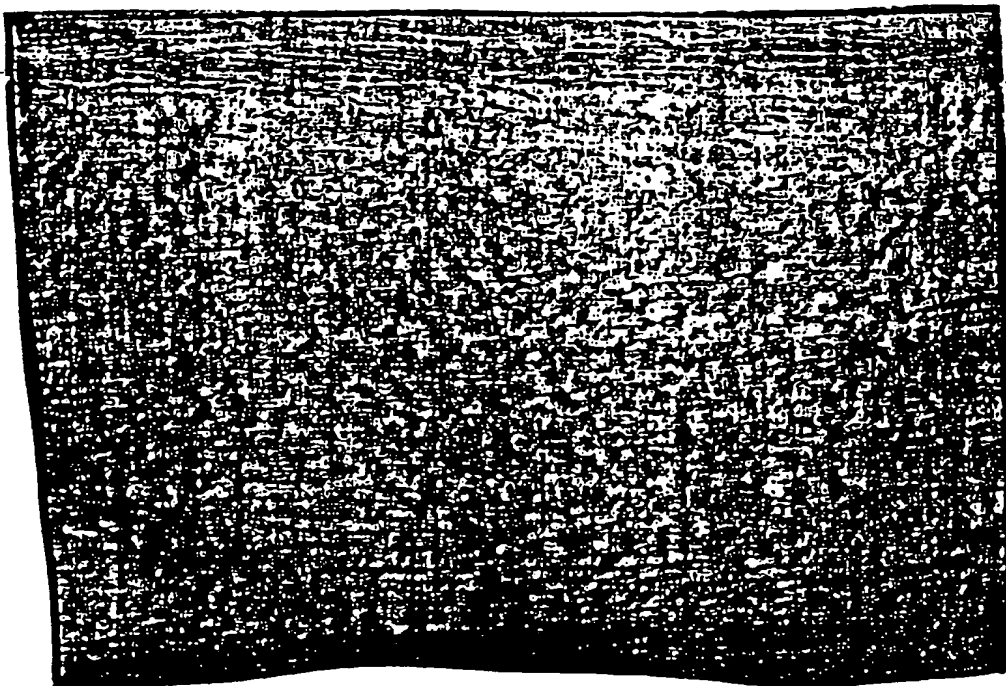


FIG. 5C

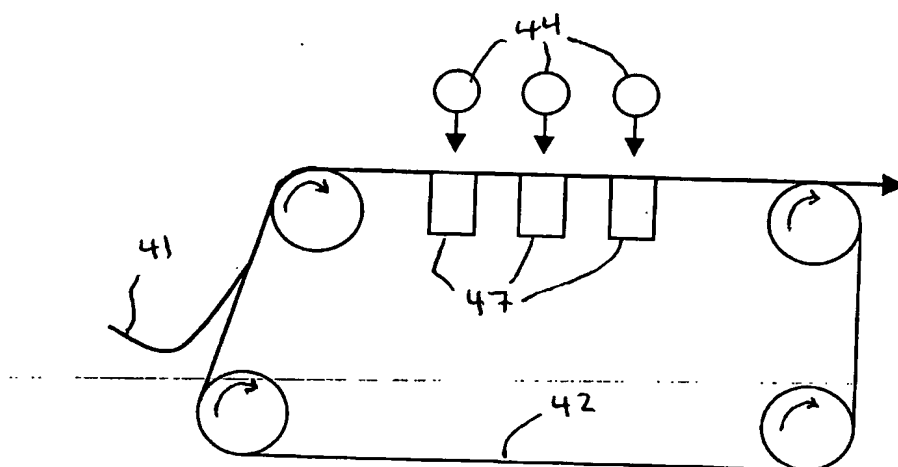
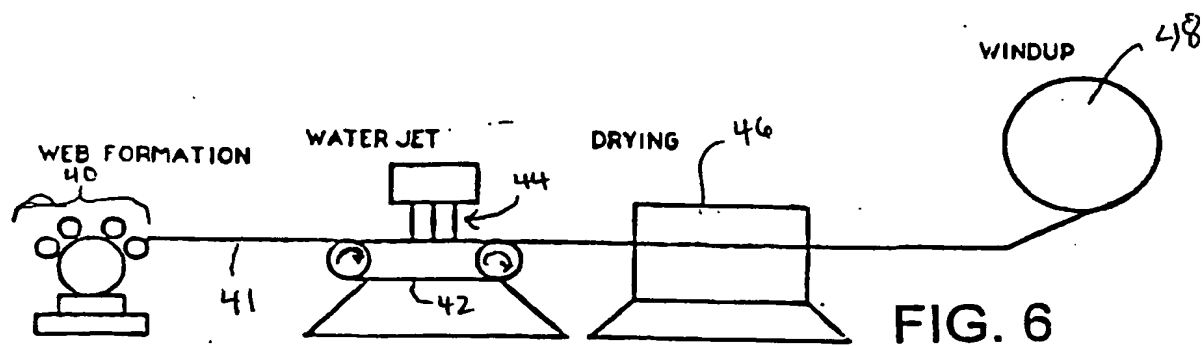


FIG 6 A

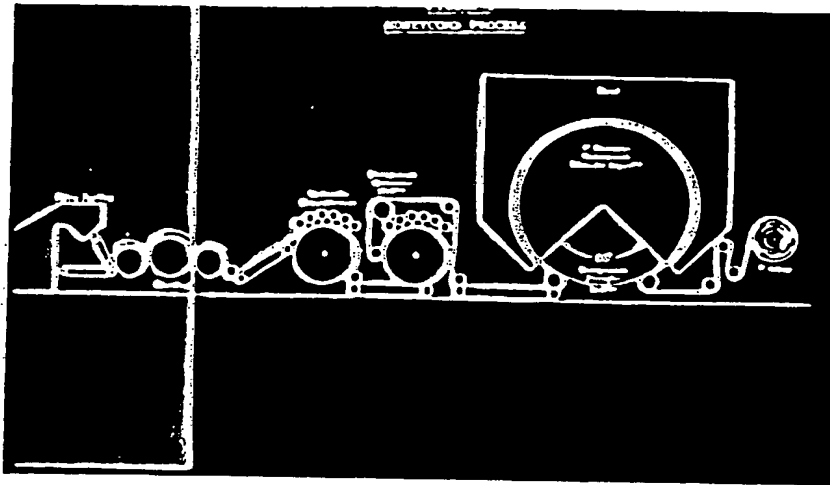


Fig. 6B

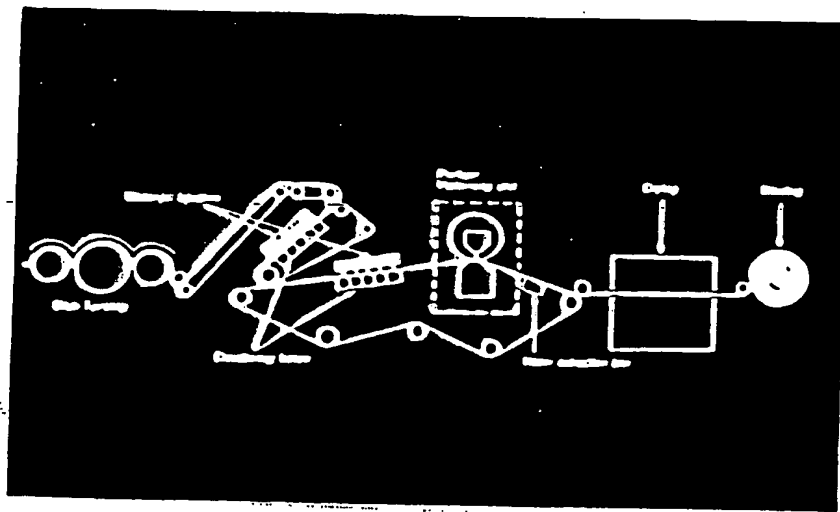


Fig. 6C

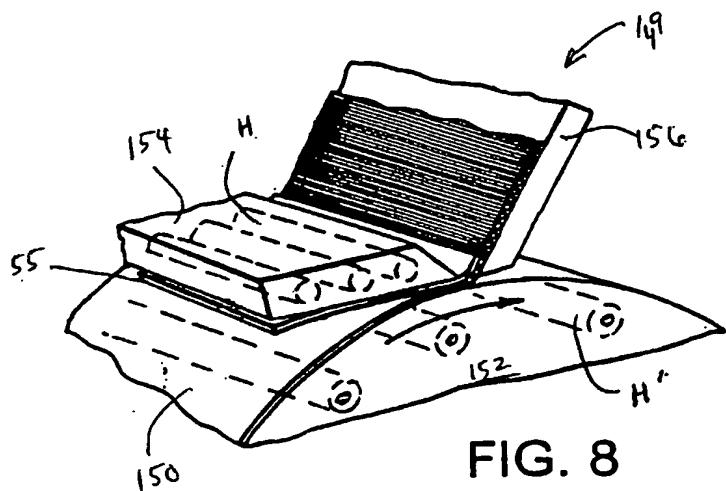


FIG. 8

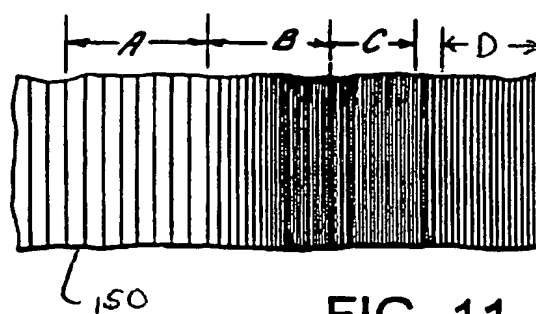


FIG. 11

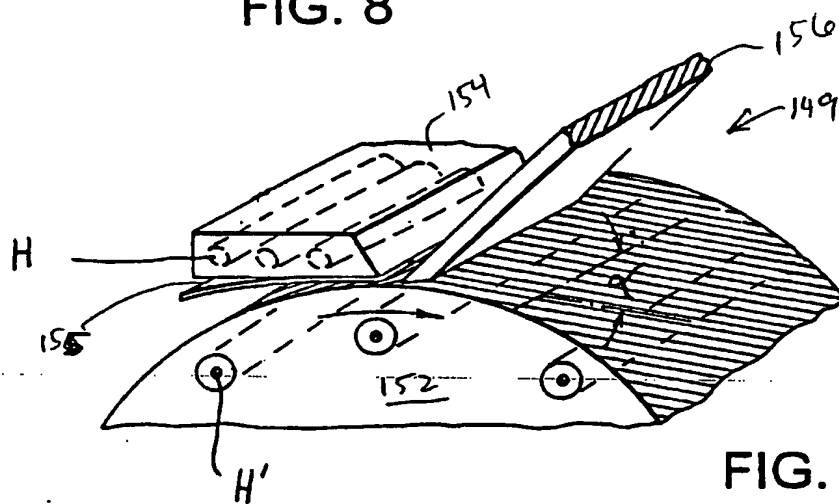


FIG. 9

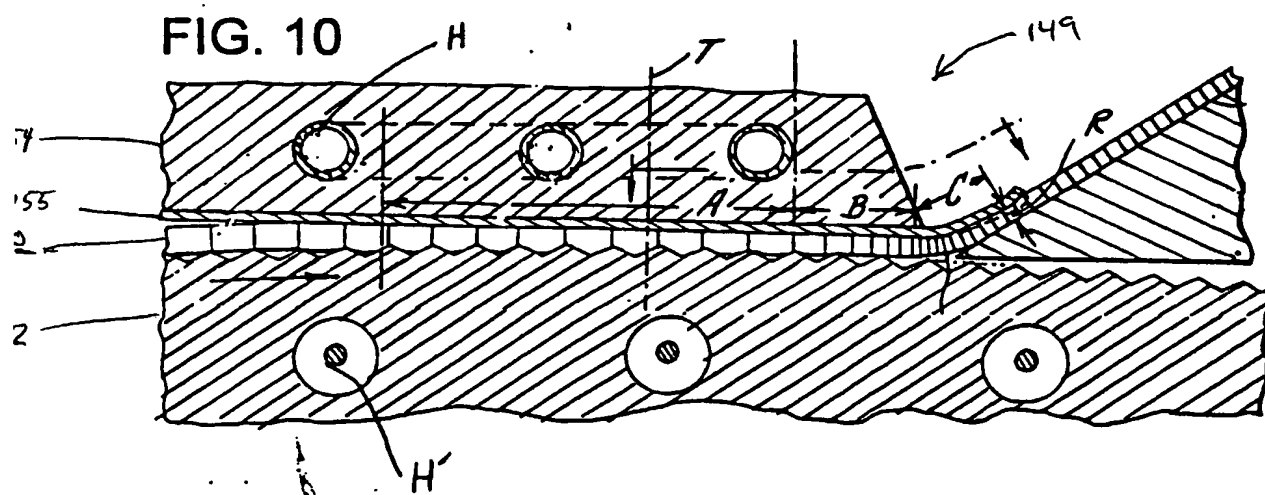


FIG. 10

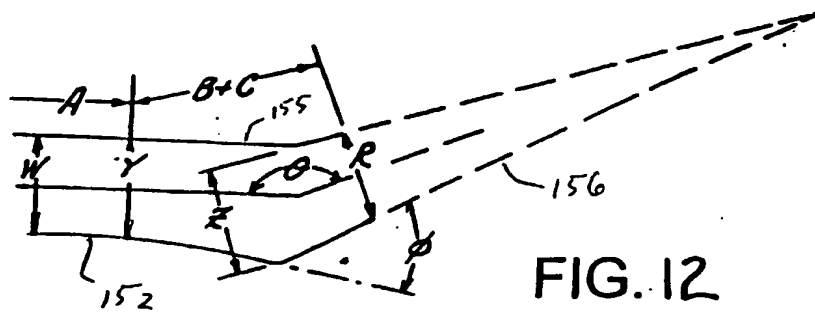


FIG. 12

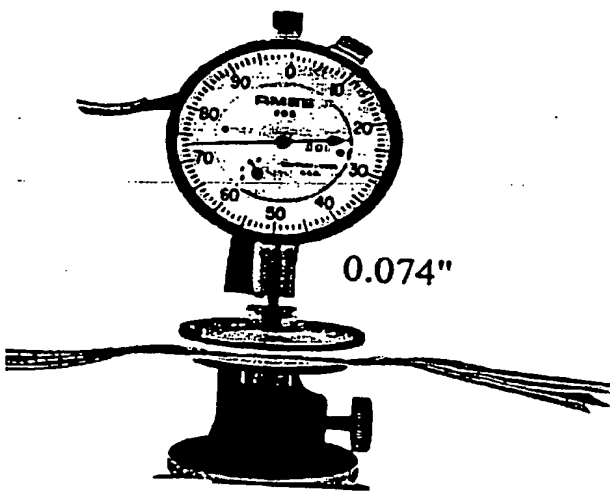


FIG. 13

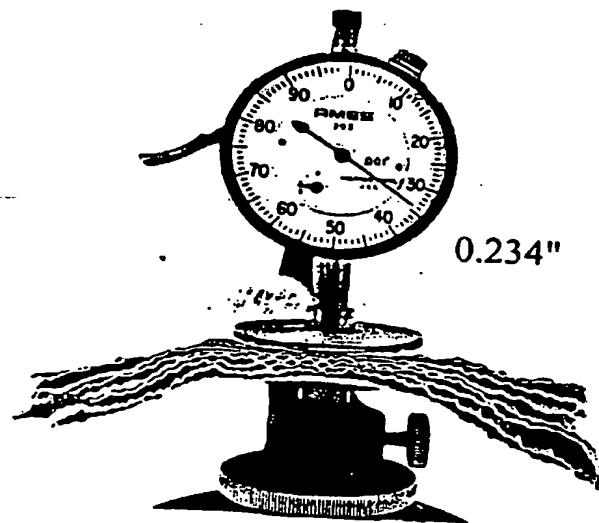


FIG. 14

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US02/09329

A. CLASSIFICATION OF SUBJECT MATTER				
IPC(7) : B32B 5/02, 9/04; D04H 1/45 US CL : 428/152, 153, 154, 341, 352 According to International Patent Classification (IPC) or to both national classification and IPC				
B. FIELDS SEARCHED				
Minimum documentation searched (classification system followed by classification symbols)				
U.S. : 428/152, 153, 154, 341, 352; 424/413; 442/408				
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched				
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)				
C. DOCUMENTS CONSIDERED TO BE RELEVANT				
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.		
Y	US 5,935,880 A (WANG et al) 10 August 1999, col. 3, lines 45 - 67; col. 4, lines 1 - 67; col. 5, lines 1 - 67; col. 6, lines 1 - 16; col. 7, lines 14 - 22; col. 8, lines 13 - 24.	1-41		
Y	US 4,090,385 A (PACKARD) 23 May 1978, col. 1, lines 56 - 68; col. 2, lines 1 - 50	2-6, 21		
Y	US 5,500,281 A (SRINIVASAN et al) 19 March 1996, col. 13, lines 63 - 67; col. 14, lines 1 - 9.	15, 22		
Y	US 4,717,329 A (PACKARD et al) 05 January 1988, col. 4, lines 43 - 68; col. 5, lines 1 - 43.	24		
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.				
<table border="0"> <tr> <td> * Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed </td> <td> "I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family </td> </tr> </table>			* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family			
Date of the actual completion of the international search		Date of mailing of the international search report		
13 JUNE 2002		08 JUL 2002		
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231		Authorized officer		
Facsimile No. (703) 305-3230		MARC A. PATTERSON <i>[Signature]</i>		
		Telephone No. (703) 305 - 3537		

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US02/09329

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y,E	US 6,375,889 B1 (HOLMES et al) 23 April 2002, col. 2, lines 7 - 54; col. 3, lines 4 - 32.	26-30, 35, 38
Y	US 4,859,169 A (WALTON et al) 22 August 1989, col. 5, lines 62 - 65.	31-34